













FRAMELESS DESIGN LED CEILING LIGHT



● Detailed description


- Pass CE Standard
- 100lm/W- high luminous flux with even light
- PC cover material, anti-UV and high temperature resistance Intelligent constant current
- driver, protect from overheat , short circuit, and undervoltage

CCT: 3000/4000/6500K

 Model number	 Power	 Size(mm)	 Hole size	 LED QTY	 Ra	 Luminous flux	 In put	 PF	 Material
KEOU MB004-9W	9W	Ø90×27	Ø71mm	50	80	720lm	100-240V	0.5	PC+Aluminum
KEOU MB004-18W	18W	Ø120×27	Ø106mm	90	80	1560lm	100-240V	0.5	PC+Aluminum
KEOU MB004-24W	24W	Ø170×27	Ø155mm	146	80	2040lm	100-240V	0.5	PC+Aluminum
KEOU MB004-36W	36W	Ø225×27	Ø206mm	360	80	3600lm	100-240V	0.5	PC+Aluminum





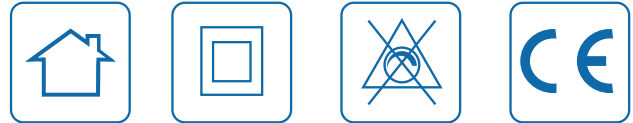







Removable driver easy wiring installation



● Detailed description

- Detachable driving convenient wiring installation
- No screw design feels comfortable
- The light emitting surface stepped design effectively controls anti - leakage light and controls the light softness
- Anti - UV diffusion plate is resistant to oil stain and dust adhesion , and plays a self - cleaning function .

CCT:3000/4000/6500K

 Model number	 Power	 Size(mm)	 Hole size	 LED QTY	 Ra	 Luminous flux	 In put	 PF	 Material
KEOU-MB001-6W	6W	Ø90×30	Ø75mm	30	80	420lm	100-240V	0.5	PC+Aluminum
KEOU-MB001-12W	12W	Ø120×30	Ø105mm	60	80	960lm	100-240V	0.5	PC+Aluminum
KEOU-MB001-16W	16W	Ø170×30	Ø150mm	90	80	1280lm	100-240V	0.5	PC+Aluminum
KEOU-MB001-24W	24W	Ø225×30	Ø206mm	120	80	1920lm	100-240V	0.5	PC+Aluminum

Removable driver easy wiring installation













● Detailed description


Detachable driving convenient wiring installation

- No screw design feels comfortable
-
- The light emitting surface stepped design effectively controls anti - leakage light and controls the light softness
- Anti - UV diffusion plate is resistant to oil stain and dust adhesion , and plays a self - cleaning function .

CCT:3000/4000/6500K

 Model number	 Power	 Size(mm)	 Hole size	 LED QTY	 Ra	 Luminous flux	 In put	 PF	 Material
KEOU-MB0011-6W	6W	90x90x30	Ø75mm	30	80	420lm	100-240V	0.5	PC+Aluminum
KEOU-MB0011-12W	12W	125x125x30	Ø105mm	60	80	960lm	100-240V	0.5	PC+Aluminum
KEOU-MB0011-16W	16W	175x175x30	Ø158mm	90	80	1280lm	100-240V	0.5	PC+Aluminum
KEOU-MB0011-24W	24W	225x225x30	Ø205mm	120	80	1920lm	100-240V	0.5	PC+Aluminum

New design, whole lamp with CE listed




● Detailed description

- The whole lamp adopts 12.8MM ultra-thin design, simple appearance.
- The lamp body adopts high light transmittance diffusion plate and LGP PMMA material to emit light soft and effective control glare.
- Independent constant current driver to meet the needs of different countries.
- The light emitting surface stepped design effectively controls anti - leakage light and controls the light softness.

CCT: 3000/4000/6500K

Model number	PowerS	Size(mm)	Hole size	LED QTY	Ra	Luminous flux	In put	PF	Material
KEOU MB002-5W	5W	Ø95x12.8mm	Ø75mm	24	80	350ml	100-240V	0.5	PC+Aluminum
KEOU MB002-7W	7W	Ø125x12.8mm	Ø100mm	36	80	490ml	100-240V	0.5	PC+Aluminum
KEOU MB002-9W	9W	Ø145x12.8mm	Ø120mm	48	80	800ml	100-240V	0.5	PC+Aluminum
KEOU MB002-12W	12W	Ø175x12.8mm	Ø150mm	60	80	1200ml	100-240V	0.5	PC+Aluminum
KEOU MB002-15W	15W	Ø195x12.8mm	Ø170mm	76	80	1500ml	100-240V	0.5	PC+Aluminum
KEOU MB002-18W	18W	Ø225x12.8mm	Ø200mm	96	80	2000ml	100-240V	0.5	PC+Aluminum

Upgraded craft

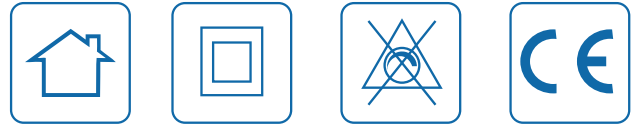

Detailed description

- Delicated appearance: outer edge protection and tightlight design
- Strictly selected materials: high-quality die-cast heat sinker, ensuring long life of the light source
- Upgraded craft: upgraded fixed wire buckle, improved the tensile strength
-

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	Hole size	LED QTY	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB021-3W	3W	Ø90x16	Ø70mm 15		80	210ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-6W	6W	Ø120x16	Ø100mm 30		80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-9W	9W	Ø145x16	Ø125mm 45		80	630ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-12W	12W	Ø170x16	Ø150mm 60		80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-15W	15W	Ø195x16	Ø170mm 75		80	1200ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-18W	18W	Ø225x16	Ø200mm 90		80	1400ml	100-240V	0.5	PC+Aluminum
	KEOU MB021-24W	24W	Ø300x16	Ø275mm 120		80	1920ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB031-3W	3W	85x85x16	70x70mm 15		80	210lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-6W	6W	120x120x16	100x100mm 30		80	420lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-9W	9W	145x145x16	125x125mm 45		80	630lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-12W	12W	170x170x16	150x150mm 60		80	960lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-15W	15W	195x195x16	170x170mm 75		80	1200lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-18W	18W	225x225x16	200x200mm 90		80	1400lm	100-240V	0.5	PC+Aluminum
	KEOU MB031-24W	24W	300x300x16	275x275mm 120		80	1920lm	100-240V	0.5	PC+Aluminum

Fastener update, enhance stretching resistance




● Detailed description

- Delicated appearance: outer edge protection and tightlight design
- Strictly selected materials: high-quality die-cast heat sinker ensuring long life of the light source
- Upgraded craft: upgraded fixed wire buckle, improved the tensile strength
- Strictly select Various application: simple and elegant appearance make it perfect combination to any indoor applications, and the installation method is suitable to most ceilings
-

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB022-6W	6W	Ø120x35mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB022-12W	12W	Ø170x35mm	60	80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB022-18W	18W	Ø225x35mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB022-24W	24W	Ø300x35mm	120	80	1920ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB032-6W	6W	120x120x35mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB032-12W	12W	170x170x35mm	60	80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB032-18W	18W	225x225x35mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB032-24W	24W	300x300x35mm	120	80	1920ml	100-240V	0.5	PC+Aluminum

Use Large arc transition design so as to prevent light leak

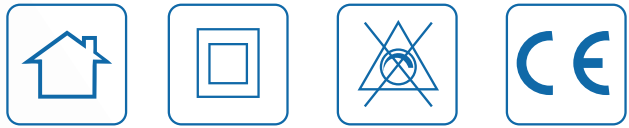


Detailed description

- Upgraded appearance: Use Large arc transition design so as to prevent light leak and be sure the light output evenly.
- Strict with materials selection: Aerospace Precision Aluminum Radiator with strong convection design to protect the of LED light source.
- Simple and refine: Classic ivory frame, modern stylish, can perfectly combine with indoor scenes.

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB023-6W	6W	Ø115x32mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB023-12W	12W	Ø165x32mm	60	80	840ml	100-240V	0.5	PC+Aluminum
	KEOU MB023-18W	18W	Ø210x32mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB023-24W	24W	Ø285x32mm	120	80	1920ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB033-6W	6W	115x115x32mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB033-12W	12W	165x165x32mm	60	80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB033-18W	18W	215x215x32mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB033-24W	24W	285x285x32mm	120	80	1920ml	100-240V	0.5	PC+Aluminum

Outer edge protection and tightlight design

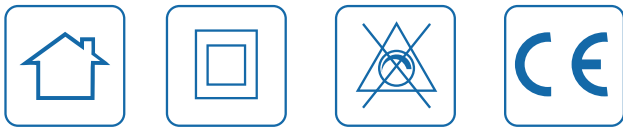


● Detailed description

- Optical PC diffusion materials make light transmittance up to 85%, beam angle up to 120° and soft light.
- High quality LED chip: high light efficiency, ultra low light decay, high CRI to restore true color.
- Intelligent IC drive, overvoltage protection, overcurrent protection, safe and stable without strobe flash, protect eyes.

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	Hole size	LED QTY	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB008-3W	3W	Ø85x20	Ø75mm	15	80	210ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-6W	6W	Ø120x20	Ø105mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-9W	9W	Ø150x20	Ø135mm	45	80	630ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-12W	12W	Ø170x20	Ø155mm	60	80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-15W	15W	Ø195x20	Ø185mm	75	80	1200ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-18W	18W	Ø225x20	Ø210mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB008-24W	24W	Ø300x20	Ø285mm	120	80	1920ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB018-3W	3W	85x85x20	75x75mm	15	80	210ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-6W	6W	120x120x20	105x105mm	30	80	420ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-9W	9W	150x150x20	135x135mm	45	80	630ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-12W	12W	172x172x20	155x155mm	60	80	960ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-15W	15W	198x198x20	185x185mm	75	80	1200ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-18W	18W	225x225x20	210x210mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB018-24W	24W	300x300x20	285x285mm	120	80	1920ml	100-240V	0.5	PC+Aluminum

Outer edge protection and tightlight design




● Detailed description

- Optical PC diffusion materials make light transmittance up to 85%, beam angle up to 120° and soft light.
- High quality LED chip: high light efficiency, ultra low light decay, high CRI to restore true color.
- Intelligent IC drive, overvoltage protection, overcurrent protection, safe and stable without strobe flash, protect eyes.

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
○ round	KEOU MB006-6W	6W	Ø120x35mm	30	80	560ml	100-240V	0.5	PC+Aluminum
	KEOU MB006-12W	12W	Ø172x35mm	60	80	840ml	100-240V	0.5	PC+Aluminum
	KEOU MB006-18W	18W	Ø225x35mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB006-24W	24W	Ø300x35mm	120	80	1920ml	100-240V	0.5	PC+Aluminum
□ square	KEOU MB016-6W	6W	125x125x35mm	30	80	560ml	100-240V	0.5	PC+Aluminum
	KEOU MB016-12W	12W	170x170x35mm	60	80	840ml	100-240V	0.5	PC+Aluminum
	KEOU MB016-18W	18W	225x225x35mm	90	80	1440ml	100-240V	0.5	PC+Aluminum
	KEOU MB016-24W	24W	300x300x35mm	120	80	1920ml	100-240V	0.5	PC+Aluminum

soft light color rendering index

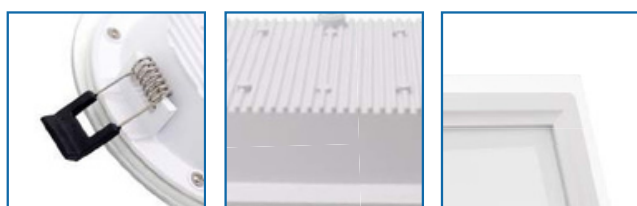

● Detailed description

- High quality tempered glass: high temperature resistance, transmittance up to 99%
- Thickened aluminum radiators, perfectly solve the heat dissipation problem
- High quality LED chip: soft light, low light decay, color rendering index
- Die - casting aluminum lamp body, durable and precise

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	Hole size	LED QTY	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB005-6W	6W	Ø100x32	Ø75mm	12	80	480ml	100-240V	0.5	PC+Aluminum
	KEOU MB005-9W	9W	Ø120x32	Ø95mm	18	80	810ml	100-240V	0.5	PC+Aluminum
	KEOU MB005-12W	12W	Ø160x32	Ø125mm	24	80	1080ml	100-240V	0.5	PC+Aluminum
	KEOU MB005-18W	18W	Ø200x32	Ø165mm	36	80	1620ml	100-240V	0.5	PC+Aluminum
	KEOU MB005-24W	24W	Ø240x37	Ø205mm	48	80	2160ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB015-6W	6W	100x100x32	Ø75mm	12	80	480ml	100-240V	0.5	PC+Aluminum
	KEOU MB015-9W	9W	120x120x32	Ø95mm	18	80	810ml	100-240V	0.5	PC+Aluminum
	KEOU MB015-12W	12W	160x160x32	Ø125mm	24	80	1080ml	100-240V	0.5	PC+Aluminum
	KEOU MB015-18W	18W	200x200x32	Ø165mm	36	80	1620ml	100-240V	0.5	PC+Aluminum
	KEOU MB015-24W	24W	240x240x37	Ø205mm	48	80	2160ml	100-240V	0.5	PC+Aluminum

soft light color rendering index




Detailed description

- High quality tempered glass: high temperature resistance, transmittance up to 99%
- Thickened aluminum radiators, perfectly solve the heat dissipation problem
- High quality LED chip: soft light, low light decay, color rendering index
- Die - casting aluminum lamp body, durable and precise

CCT: 3000/4000/6500K

	Model number	Power	Size(mm)	Hole size	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB003-5W	5W	Ø100x32	Ø75mm	80	400ml	100-240V	0.5	PC+Aluminum
	KEOU MB003-7W	7W	Ø120x32	Ø95mm	80	630ml	100-240V	0.5	PC+Aluminum
	KEOU MB003-10W	10W	Ø160x32	Ø125mm	80	900ml	100-240V	0.5	PC+Aluminum
	KEOU MB003-15W	15W	Ø200x32	Ø165mm	80	1350ml	100-240V	0.5	PC+Aluminum
	KEOU MB003-25W	25W	Ø240x37	Ø205mm	80	2250ml	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB013-5W	5W	100x100x32	Ø75mm	80	400ml	100-240V	0.5	PC+Aluminum
	KEOU MB013-7W	7W	120x120x32	Ø95mm	80	630ml	100-240V	0.5	PC+Aluminum
	KEOU MB013-10W	10W	160x160x32	Ø125mm	80	900ml	100-240V	0.5	PC+Aluminum
	KEOU MB013-15W	15W	200x200x32	Ø165mm	80	1350ml	100-240V	0.5	PC+Aluminum
	KEOU MB013-25W	25W	240x240x37	Ø205mm	80	2250ml	100-240V	0.5	PC+Aluminum

With elegant appearance

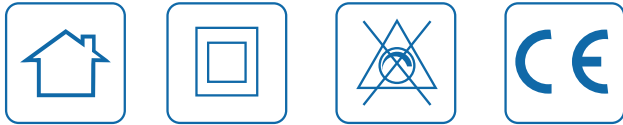



Detailed description

- 3000K 4000K 6500K is the main lighting , red green blue of auxiliary lighting as a decorative embellishment.
- Recessed structure is more elegant appearance to protect the frame of lights exposed,
- switch the color of the lights instantly

CCT:3000/4000/6500K

	Model number	Power	Size(mm)	Hole size	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB007-6W	3+3W	Ø105x25	Ø70mm	80	480lm	100-240V	0.5	PC+Aluminum
	KEOU MB007-9W	6+3W	Ø145x25	Ø105mm	80	720lm	100-240V	0.5	PC+Aluminum
	KEOU MB007-16W	12+4W	Ø195x25	Ø155mm	80	1280lm	100-240V	0.5	PC+Aluminum
	KEOU MB007-24W	18+6W	Ø245x25	Ø205mm	80	1920lm	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB017-6W	3+3W	105x105x25	70x70mm	80	480lm	100-240V	0.5	PC+Aluminum
	KEOU MB017-9W	6+3W	145x145x25	105x105mm	80	720lm	100-240V	0.5	PC+Aluminum
	KEOU MB017-16W	12+4W	195x195x25	155x155mm	80	1280lm	100-240V	0.5	PC+Aluminum
	KEOU MB017-24W	18+6W	245x245x25	205x205mm	80	1920lm	100-240V	0.5	PC+Aluminum

With elegant appearance

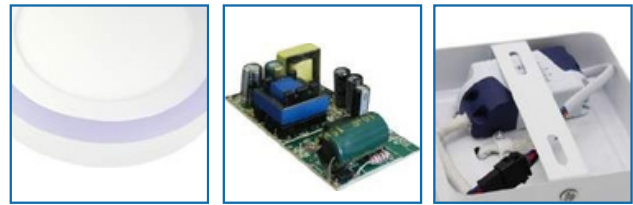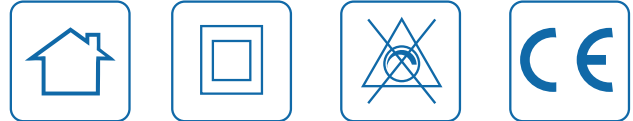

● Detailed description


- 3000K 4000K 6500K is the main lighting , red green blue of auxiliary lighting as a decorative embellishment.
- Recessed structure is more elegant appearance to protect the frame of lights exposed,
- switch the color of the lights instantly

CCT:3000/4000/6500K

	Model number	Power	Size(mm)	Ra	Luminous flux	In put	PF	Material
○ ROUND	KEOU MB009-6W	3+3W	Ø105x38mm	80	480lm	100-240V	0.5	PC+Aluminum
	KEOU MB009-9W	6+3W	Ø145x38mm	80	720lm	100-240V	0.5	PC+Aluminum
	KEOU MB009-16W	12+4W	Ø195x38mm	80	1280lm	100-240V	0.5	PC+Aluminum
	KEOU MB009-24W	18+6W	Ø245x38mm	80	1920lm	100-240V	0.5	PC+Aluminum
□ SQUARE	KEOU MB019-6W	3+3W	105x105x38mm	80	480lm	100-240V	0.5	PC+Aluminum
	KEOU MB019-9W	6+3W	145x145x38mm	80	720lm	100-240V	0.5	PC+Aluminum
	KEOU MB019-16W	12+4W	195x195x38mm	80	1280lm	100-240V	0.5	PC+Aluminum
	KEOU MB019-24W	18+6W	245x245x38mm	80	1920lm	100-240V	0.5	PC+Aluminum



Multiple color choices




● Detailed description


- Frame: Anti-glare design, more eye protection
- High quality chip: high light efficiency, ultra low light decay, high color rendering index
- Lamp body: the shell in outer plastic with inner aluminum alloy, using flame retardant PC material, meets the requirements of various countries hipot test standard

CCT:3000/4000/6500K

 Model number	 Power	 Size(mm)	 Hole size	 LED QTY	 Luminous flux	 In put	 PF	 Material
KEOU TD001-6W	6W	Φ98×43	Φ75mm	15	480lm	100-240V	0.5	PC+Aluminum
KEOU TD001-9W	9W	Φ113×45.6	Φ85mm	24	720lm	100-240V	0.5	PC+Aluminum
KEOU TD001-12W	12W	Φ140×49.7	Φ110mm	32	960lm	100-240V	0.5	PC+Aluminum
KEOU TD001-18W	18W	Φ175×55.3	Φ140mm	48	1440lm	100-240V	0.5	PC+Aluminum

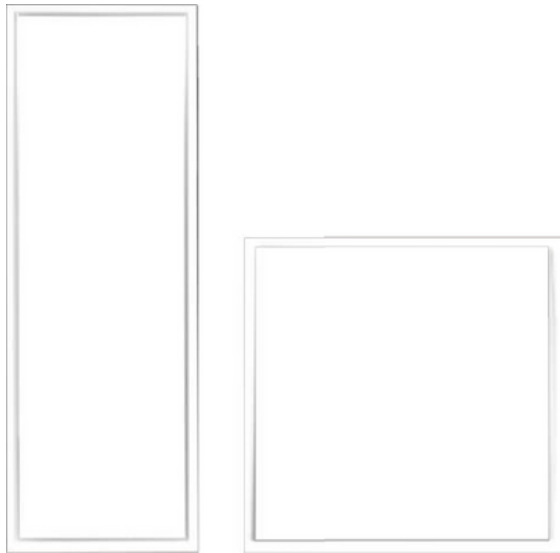



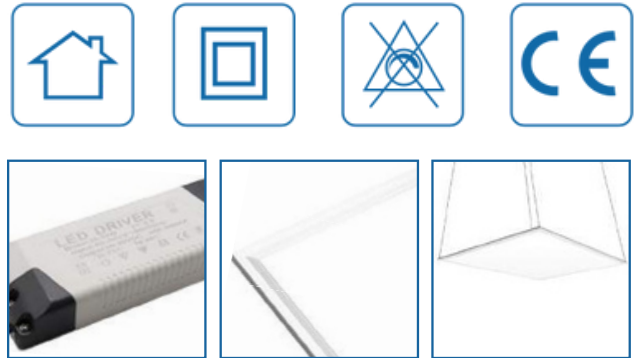






Bright energy-saving long lifetime



● Detailed description


- Aluminum frame: high quality thick aluminum, white paint, rust proof and the rub off
- High-brightness LED chip: bright energy-saving, long lifetime
- Chip: SMD LED evenly distributed on both sides of the lamp body
- Diffusion plate: polymer PC light diffusion plate
-

CCT: 3000/4000/6500K

 Model number	 Power	 Size(mm)	 LED Type	 LED QTY	 Luminous flux	 In put	 PF	 Material
KEOU-6060-36W	36W	595x595x9	SMD 4014	180	3600lm	100-240V	0.9	PC+Aluminum
KEOU-6060-40W	40W	595x595x9	SMD 4014	200	4000lm	100-240V	0.9	PC+Aluminum
KEOU-6060-48W	48W	595x595x9	SMD 4014	240	4800lm	100-240V	0.9	PC+Aluminum
KEOU-30120-36W	36W	1195x295x9	SMD 4014	180	3600lm	100-240V	0.9	PC+Aluminum
KEOU-30120-40W	40W	1195x295x9	SMD 4014	200	4000lm	100-240V	0.9	PC+Aluminum
KEOU-30120-48W	48W	1195x295x9	SMD 4014	240	4800lm	100-240V	0.9	PC+Aluminum
KEOU-60120-72W	72W	1195x595x9	SMD 4014	360	7200lm	100-240V	0.9	PC+Aluminum



Heat dissipation body

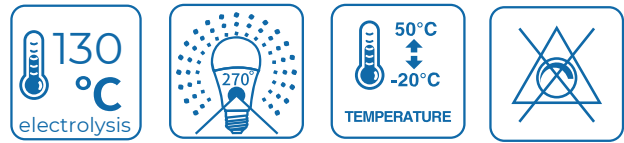

CCT:3000/4000/6500K

	Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
○ WITHOUT DISSIPATION PLATE	KEOU QP003-5W	5W	Ø55x103mm	5	70	450lm	100-240V	0.5	PC+Aluminum
	KEOU QP003-7W	7W	Ø60x113mm	7	70	630lm	100-240V	0.5	PC+Aluminum
	KEOU QP003-9W	9W	Ø60x113mm	9	70	810lm	100-240V	0.5	PC+Aluminum
	KEOU QP003-12W	12W	Ø60x118mm	12	70	1080lm	100-240V	0.5	PC+Aluminum
	KEOU QP003-15W	15W	Ø70x128mm	15	70	1350lm	100-240V	0.5	PC+Aluminum
	KEOU QP003-18W	18W	Ø80x145mm	18	70	1620lm	100-240V	0.5	PC+Aluminum
○ WITH DISSIPATION PLATE	KEOU-QP008-3W	3W	Ø45x85mm	4	80	240lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-5W	5W	Ø50x90mm	6	80	450lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-7W	7W	Ø60x112mm	9	80	630lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-9W	9W	Ø65x118mm	12	80	900lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-12W	12W	Ø70x125mm	16	80	1200lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-15W	15W	Ø80x142mm	20	80	1500lm	100-240V	0.5	PC+Aluminum
	KEOU-QP008-18W	18W	Ø95x160mm	24	80	1800lm	100-240V	0.5	PC+Aluminum



Best reflective rate with even light



● Detailed description

- High transmittance PC cover, luminousness up to 85%, beam angle 270°, with very soft light.
- Top brand LED chip: high luminous efficiency, low light decay and high CRI restore true color.
- Smart IC constant current driver, overvoltage protection & overcurrent protection, safe, stable and flicker free, protect eyes.
- Heat dissipation body: PC & aluminum material, fast heat dissipation, insulated & durable.


with dissipation plate

CCT: 3000/4000/6500K

Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
KEOU-QP009-5W	5W	Ø50x95mm	78	80	450lm	100-240V	0.5	PC+Aluminum
KEOU-QP009-9W	9W	Ø60x116mm	12	80	810lm	100-240V	0.5	PC+Aluminum
KEOU-QP009-13W	13W	Ø70x128mm	16	80	1300lm	100-240V	0.5	PC+Aluminum
KEOU-QP009-18W	18W	Ø80x142mm	24	80	1800lm	100-240V	0.5	PC+Aluminum
KEOU-QP009-28W	28W	Ø100x183mm	48	80	2800lm	100-240V	0.5	PC+Aluminum
KEOU-QP009-38W	38W	Ø115x210mm	52	80	3800lm	100-240V	0.5	PC+Aluminum



Best reflective rate with even light



● Detailed description



- The Cylindrical Light Source: Adopt 270° cylindrical luminescence technology, no dark shadows.
- Safety performance: CE approved, safe & reliable, with voltage AC85-265V, suitable for any country.
- Three-profiles design, seals tighter, antidust, antirag and antinsect.
- Flexible application: E27/B22/E14 lamp base all available, can meet various installation requirements.
-

WITHOUT DISSIPATION PLATE

CCT:3000/4000/6500K

Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
KEOU-QP005-5W	5W	Ø50x95mm	78	0	450lm	220-240V	0.5	PC+Aluminum
KEOU-QP005-9W	9W	Ø60x116mm	12	80	810lm	220-240V	0.5	PC+Aluminum
KEOU-QP005-13W	13W	Ø70x128mm	16	80	1300lm	220-240V	0.5	PC+Aluminum
KEOU-QP005-18W	18W	Ø80x142mm	24	80	1800lm	220-240V	0.5	PC+Aluminum
KEOU-QP005-28W	28W	Ø100x183mm	48	80	2800lm	220-240V	0.5	PC+Aluminum
KEOU-QP005-38W	38W	Ø120x210mm	52	80	3800lm	220-240V	0.5	PC+Aluminum
KEOU QP005-48W	48W	Ø125x220mm	56	80	4800lm	220-240V	0.5	PC+Aluminum
KEOU QP005-58W	58W	Ø135x230mm	68	80	5800lm	220-240V	0.5	PC+Aluminum
KEOU QP005-68W	68W	Ø150x254mm	80	80	6800lm	220-240V	0.5	PC+Aluminum

Smart IC constant current driver

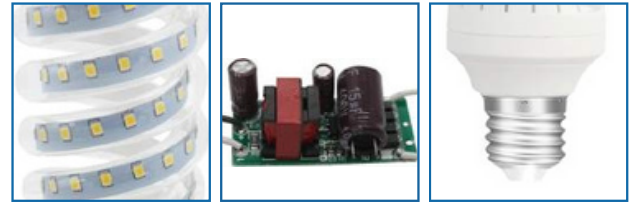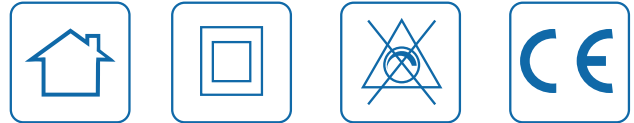

● Detailed description

- Flexible application: E27/B22/E14 lamp base all available, can meet various installation requirements
- Good quality LED Chip: light with smd2835, high luminous efficiency, lower luminous flux
- Top brand LED chip: high luminous efficiency, low light decay and high CRI restore true color

CCT:3000/4000/6500K


Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
KEOU LX-5W	5W	Ø45x107mm	24	70	500lm	100-240V	0.5	PC+Aluminum
KEOU LX-7W	7W	Ø45x107mm	36	70	700lm	100-240V	0.5	PC+Aluminum
KEOU LX-9W	9W	Ø45x112mm	48	70	900lm	100-240V	0.5	PC+Aluminum
KEOU LX-12W	12W	Ø55x156mm	64	70	1200lm	100-240V	0.5	PC+Aluminum
KEOU LX-16W	16W	Ø55x165mm	88	70	1600lm	100-240V	0.5	PC+Aluminum
KEOU LX-20W	20W	Ø55x180mm	96	70	2000lm	100-240V	0.5	PC+Aluminum
KEOU LX-16W	23W	Ø75x205mm	120	70	2300lm	100-240V	0.5	PC+Aluminum
KEOU LX-20W	30W	Ø75x205mm	160	70	3000lm	100-240V	0.5	PC+Aluminum

27
LX-23W

KEOU LX-30W



Smart IC constant current driver

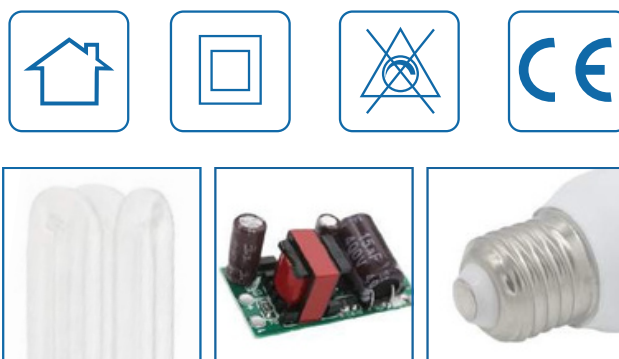

● Detailed description


- Flexible application: E27/B22/E14 lamp base all available, can meet various installation requirements
- Good quality LED Chip: light with smd2835, high luminous efficiency, lower luminous flux
- Top brand LED chip: high luminous efficiency, low light decay and high CRI restore true color

CCT: 3000/4000/6500K

Model number	Power	Size(mm)	LED QTY	Ra	Luminous flux	In put	PF	Material
KEOU 2U16-3W	3W	Ø36x106mm	16	70	270lm	100-240V	0.5	PC+Aluminum
KEOU 3U24-5W	5W	Ø40x113mm	24	70	500lm	100-240V	0.5	PC+Aluminum
KEOU 3U36-7W	7W	Ø40x132mm	36	70	700lm	100-240V	0.5	PC+Aluminum
KEOU 3U48-9W	9W	Ø40x143mm	48	70	900lm	100-240V	0.5	PC+Aluminum
KEOU 3U60-12W	12W	Ø52x170mm	60	70	1200lm	100-240V	0.5	PC+Aluminum
KEOU 4U80-16W	16W	Ø58x180mm	80	70	1600lm	100-240V	0.5	PC+Aluminum
KEOU 4U100-20W	20W	Ø58x180mm	100	70	2000lm	100-240V	0.5	PC+Aluminum
KEOU 4U120-23W	23W	Ø73x230mm	120	70	2300lm	100-240V	0.5	PC+Aluminum
KEOU 4U160-30W	30W	Ø73x260mm	160	70	3000lm	100-240V	0.5	PC+Aluminum
KEOU 4U180-36W	36W	Ø73x280mm	180	70	3600lm	100-240V	0.5	PC+Aluminum



Optical lens: 90°,
single focus, Improve
light utilization

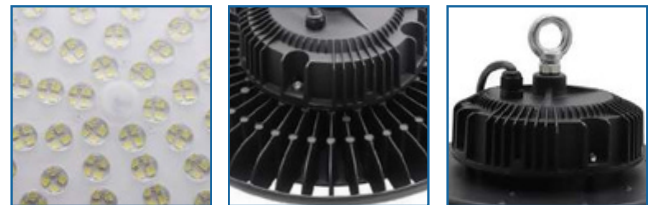

● Detailed description

- o Integrate lamp body with environmentally aluminum, die casting.
- o Lens use Teijin PC optical material. High weather resistance. LED light source is more stable.

CCT:3000/4000/6500K

	Model number	Power	Size(mm)	LED QTY	Waterproof	Luminous flux	Beam Angle	PF	Ra	Warranty
DIE-CAST ALUMINIUM	KEOU-UFO1-100W	100W	Ø250x125	120	IP65	11000lm	90°	>0.95	80	3 Years
	KEOU-UFO1-150W	150W	Ø300x125	180	IP65	16500lm	90°	>0.95	80	3 Years
	KEOU-UFO1-200W	200W	Ø350x125	240	IP65	22000lm	90°	>0.95	80	3 Years
TAMPED ALUMINIUM	KEOU-UFO2-100W	100W	Ø300x110	120	IP65	11000lm	90°	>0.95	80	2 Years
	KEOU-UFO2-150W	150W	Ø350x110	180	IP65	16500lm	90°	>0.95	80	2 Years
	KEOU-UFO2-200W	200W	Ø400x110	240	IP65	22000lm	90°	>0.95	80	2 Years